

LOCATION 524 N. Broad CITY GAST.

BETWEEN Reverse Curve STREET & E. WALNUT STREET

|                     | SIZE        | TYPE     | LENGTH    | INSTALLED | RETIRED        | RENEWED     |
|---------------------|-------------|----------|-----------|-----------|----------------|-------------|
| MAIN TO BLDG.       | <u>3/4"</u> | <u>P</u> | <u>70</u> |           | <u>10 - 14</u> | <u>- 96</u> |
| MAIN TO PROP. LINE  | <u>"</u>    | <u>"</u> | <u>5</u>  |           |                |             |
| PROP. LINE TO BLDG. | <u>"</u>    | <u>"</u> | <u>65</u> |           |                |             |

ENTERS: 524 BRANCHED INTO:

TAP SIZE: 3/4" PRESSURE 60 PSI \_\_\_\_\_ INCHES W.C. LOCATION N. of 524


PRESSURE TEST: @ 100 PSI FOR 1 1/4 HRS. BY GK

MAIN-SIZE 2 C.I. \_\_\_\_\_ BARE STEEL \_\_\_\_\_ COATED STEEL \_\_\_\_\_ PLASTIC / YEAR INSTALLED 96

DEPTH: 3 FT. IN. LOCATION E. side of Broad

"A" P/S READING P TOTAL ANODES 1# \_\_\_\_\_ 17# \_\_\_\_\_ L.R. # \_\_\_\_\_

REMARKS:

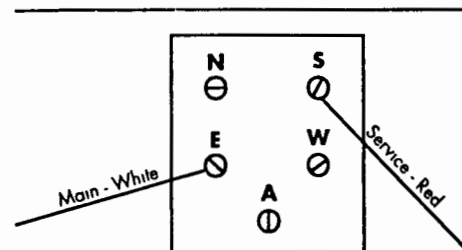

| Test Station                               |          |          |
|--|----------|----------|
| Reading & Location                         | Lead     | Volts    |
| P/S Pipeline Lead - Red<br>New Service     | <u>S</u> | <u>P</u> |
| P/S Pipeline Lead - White<br>Existing Main | <u>E</u> |          |

ENG. DEPT. USE ONLY